


Max-10 Pedestal - Gen. 2

Specs & Techs/ Made in the USA/ BABA Compliant

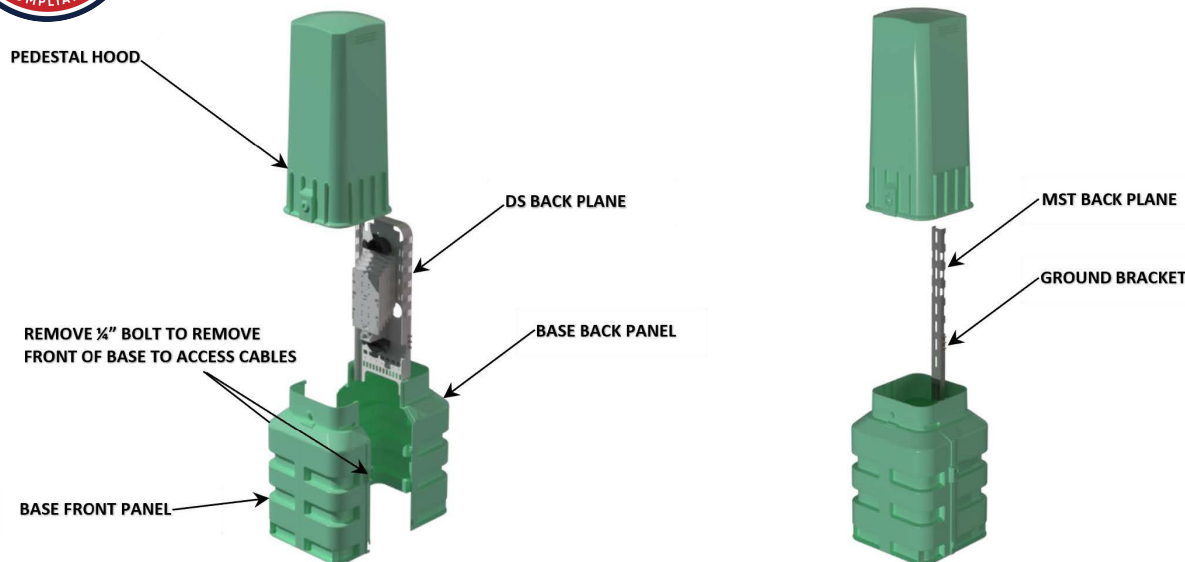

DESCRIPTION:

The Max-10 Pedestal is the Swiss Army knife of pedestals! The Max 10 has a multi-role back plane with configurations for mid-span access and direct splice drops, pre-terminated drops for both MIDCOUPLERS or hardened drop's. The Max-10 can also be configured with a universal mounting bracket for MST's or Fiber Box applications. This rugged and contractor friendly pedestal is a game changer in the FTTX world!

KEYFEATURES:

- Rugged Ped Base will not heave or shift due to the waffled exterior.
- No Ped Stake required.
- 14"x17" base can house slack drop cable.
- Removable front panel allows for easy installation of conduit or direct bury fiber
- Rodent resistant lid and collar.
- Up to 288 single fuse splices per pedestal.
- Pedestal can house up to 6 trays and each tray holds up to 48 single fuse splices.
- Quarter turn locking mechanism
- Multi Use Back Planes; Direct splice, Connectorized SC/APC and Hardened drop, MST's or Fiber Box.



PERFORMANCE:


- Meets UL 94 Flammability requirements.
- Max 10 Pedestal can go to as low as -40°F [-40°C] in extreme conditions.
- Heat deflection temperature (HDT) under a load of 264psi [1.8 MPa] at 248°F - 356°F [120°C-180°C].
- Deflection temperature @ 1160psi [8MPa] at 176°F - 302°F [80°C-150°C].

CONTACT & INFORMATION:


Tel: (920) 328-1020 Email: sales@raddnetwork.com Website: RaDDNetwork.com



MAX-10-DS (DIRECT SPLICE):

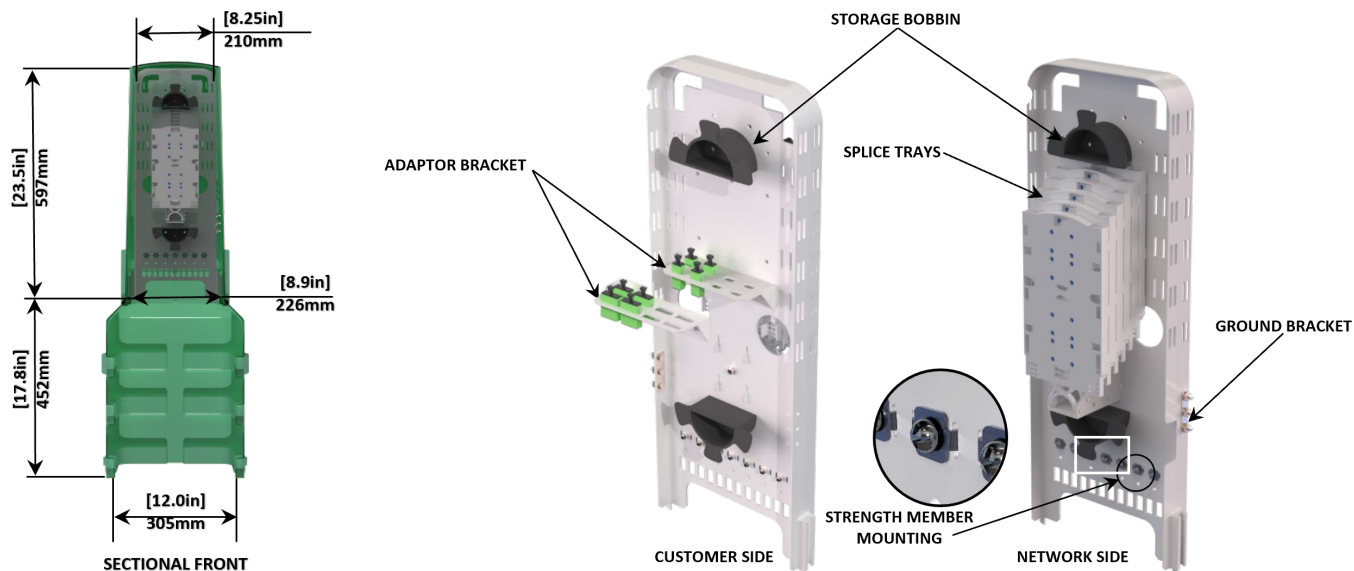


MAX-10-DS/OPTI (HARDENED DROP):

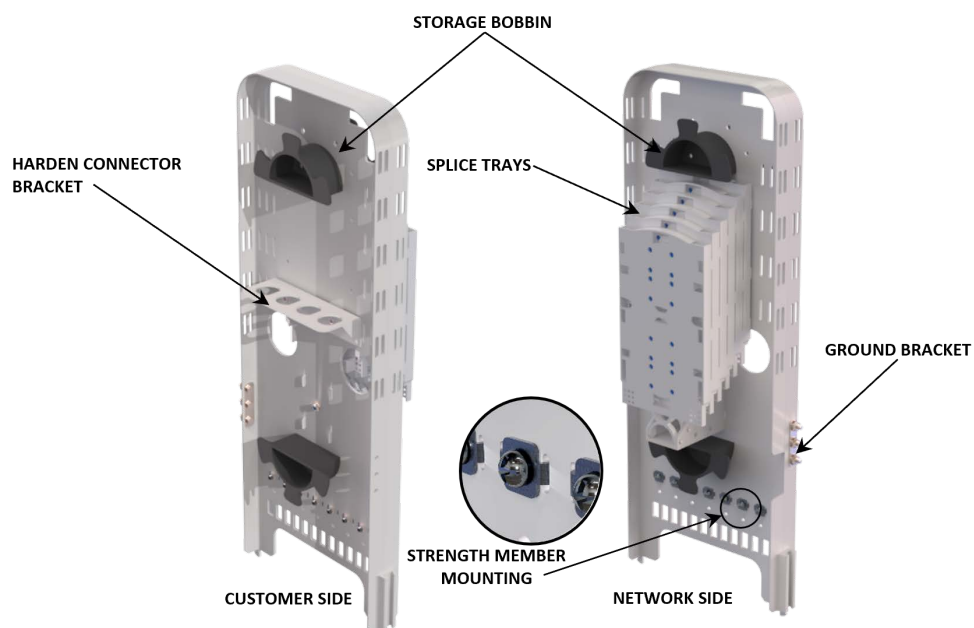


CONTACT & INFORMATION:


Tel: (920) 328-1020 Email: sales@raddnetwork.com Website: RaDDNetwork.com

MAX-10-SC/APC (SIMPLEX OR DUPLEX SC/APC)

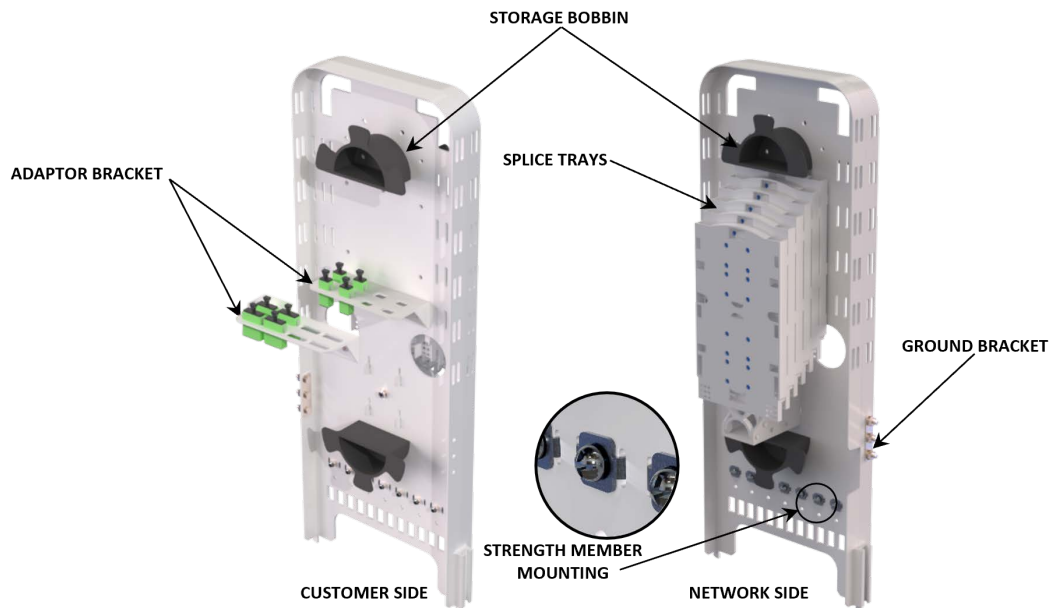

MAX-10-MST/FB (UNIVERSAL MOUNTING ARM):

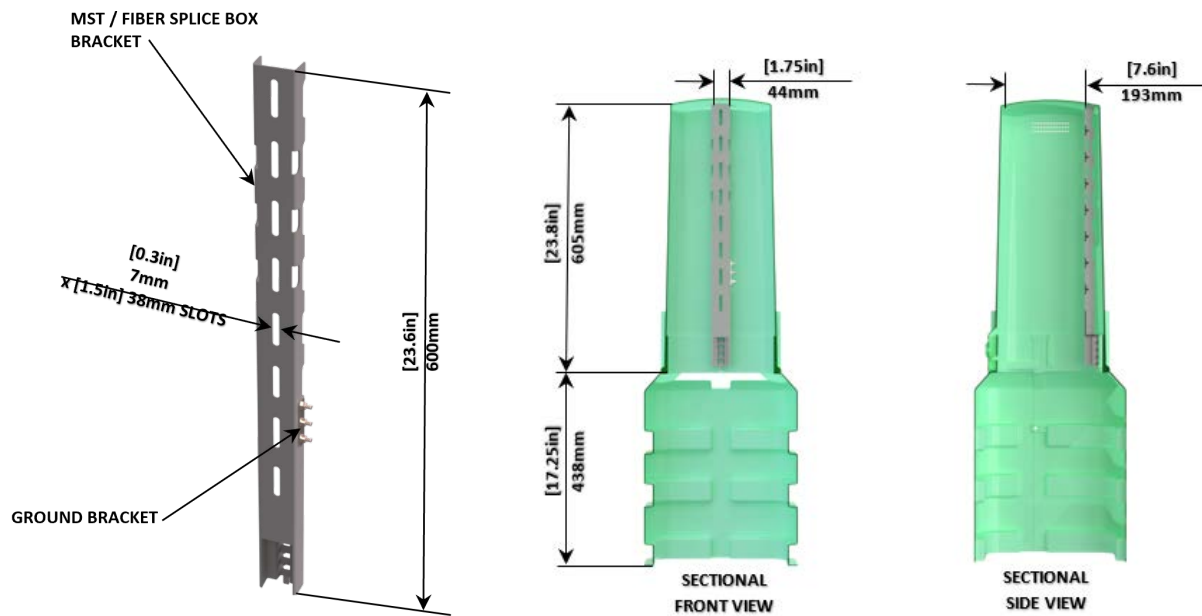

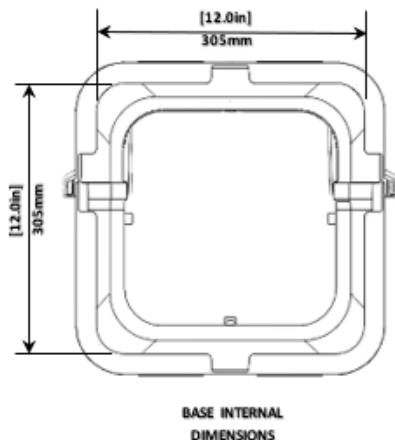

Weight: 27.6 lbs/ 12.5kg

Qty/Pallet: 48

INSTALLATION INSTRUCTIONS:

As with all structures, proper installation and backfilling are critical. Improper installation practices may lead to failure. All practices should comply with OSHA, State, Federal regulations.

STEP 1 – BEDDING

Base should be placed on a minimum of 6" of properly compacted, free draining material. $\frac{3}{4}$ " washed stone or sand is recommended.

STEP 2 – BACKFILLING

Backfilling around base should be done uniformly in 3"-4" lifts. Material should be properly compacted to meet project specifications; excessive mechanical compaction should be avoided.