


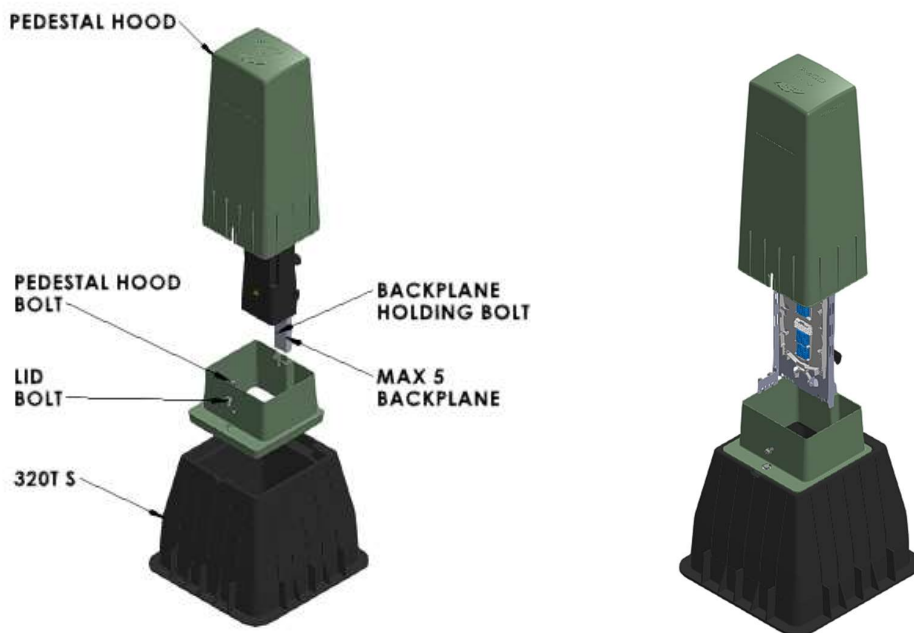

MAX-5 PEDESTAL

SPECS AND TECHS:

DESCRIPTION:

The Max-5 Pedestal is a compact yet strong and secure multi-function FTTX Pedestal.

The Max 5 Pedestal utilizes our AXS-320T-S Drop access vault, allowing for the pedestal housing to be added to an existing AXS-320T-S vault, or convert the Max-5 Pedestal back to an underground vault by just changing out the lid.



KEY FEATURES:

- Compact size for low Customer and R/W visibility impact.
- AXS-320T-S base allows for mainline and drop cable storage.
- Self-support base does not require a pedestal stake.
- Pedestal Base can be removed separately from the dome for easy drop and cable access.
- Universal mounting bracket for MST's, Distribution Splice Enclosures, or Open Architecture with Splice Trays and (4) SC/APC Adapters.
- Rodent resistant lid and collar.
- Up to 96 single fuse splices per pedestal.
- Pedestal can house up to 2 trays and each tray holds up to 48 single fuse splices.
- Optional High Viz Fiberglass Warning marker for visibility in deep snow or tall weeds & brush.
- Optional ground/bond bracket.




PERFORMANCE:

- Meets UL 94 Flammability requirements.
- Max-5 Pedestal can go to as low as -40°F [-40°C] in extreme conditions.
- Heat deflection temperature (HDT) under a load of 264psi [1.8 MPa] at 248°F - 356°F [120°C-180°C].
- Deflection temperature @ 1160psi [8MPa] at 176°F - 302°F [80°C-150°C].

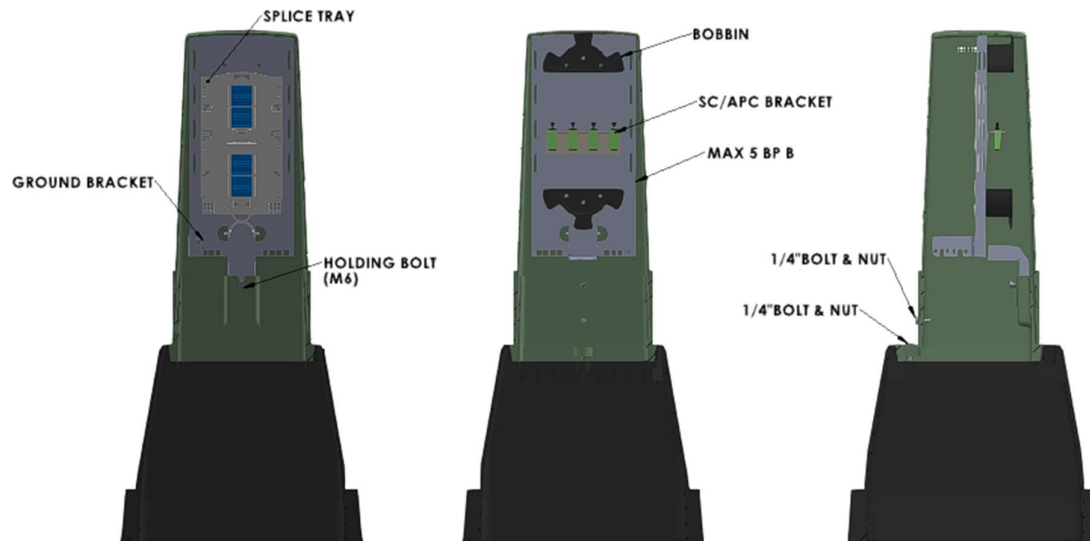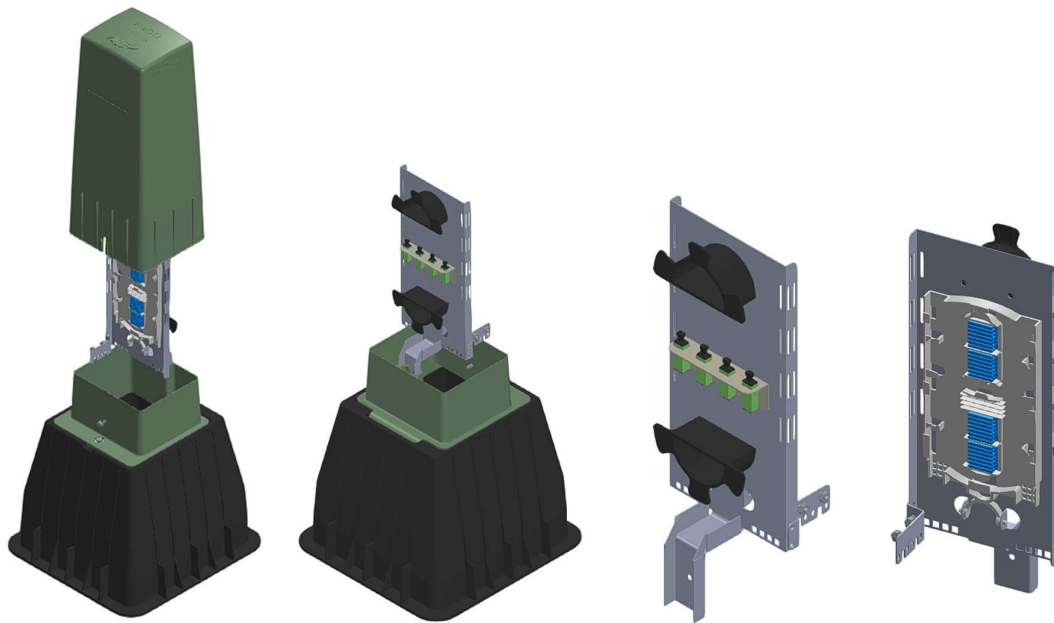

MAX-5-DS (Direct Splice)

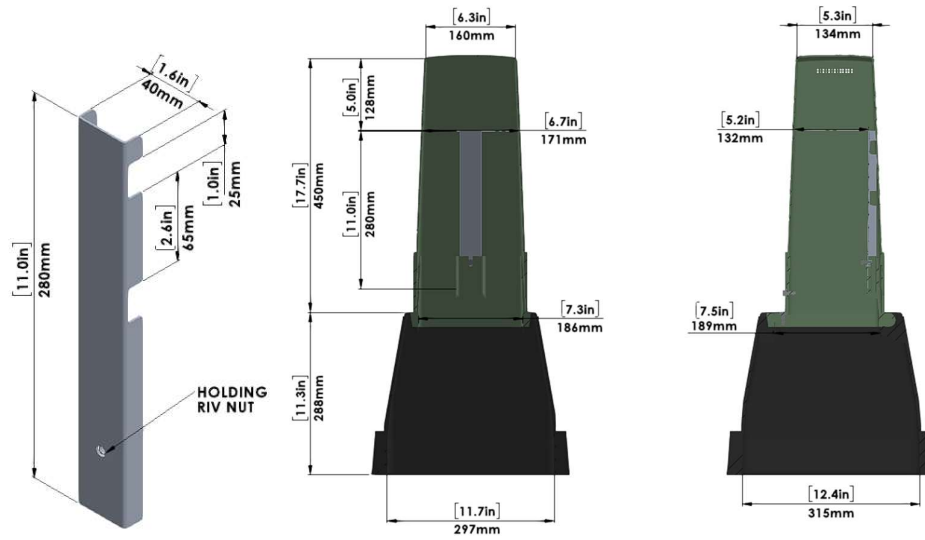

MAX-5-MST
(Universal Mounting Arm)

Weight lbs/KG	6-8 lbs
---------------	---------

Loading Qty's (Product Code)	QTY/Pallet	53' Semi Trailer	Container
MAX-5	24	576	n/a

INSTALLATION INSTRUCTIONS:

As with all structures, proper installation and backfilling are critical. Improper installation practices may lead to failure. All practices should comply with OSHA, State, Federal regulations.

STEP 1 – BEDDING

Base should be placed on a minimum of 4" of properly compacted, free draining material. ¾" washed stone or sand is recommended.

Optional: Interior of base can be filled with 2" of pea gravel to further deter rodent activity.

STEP 2 – BACKFILLING

Backfilling around base should be done uniformly in 3" -4" lifts. Material should be properly compacted to meet project specifications; excessive mechanical compaction should be avoided.

Feb 5 2024